

# PARQUES CANINOS

PLATIME



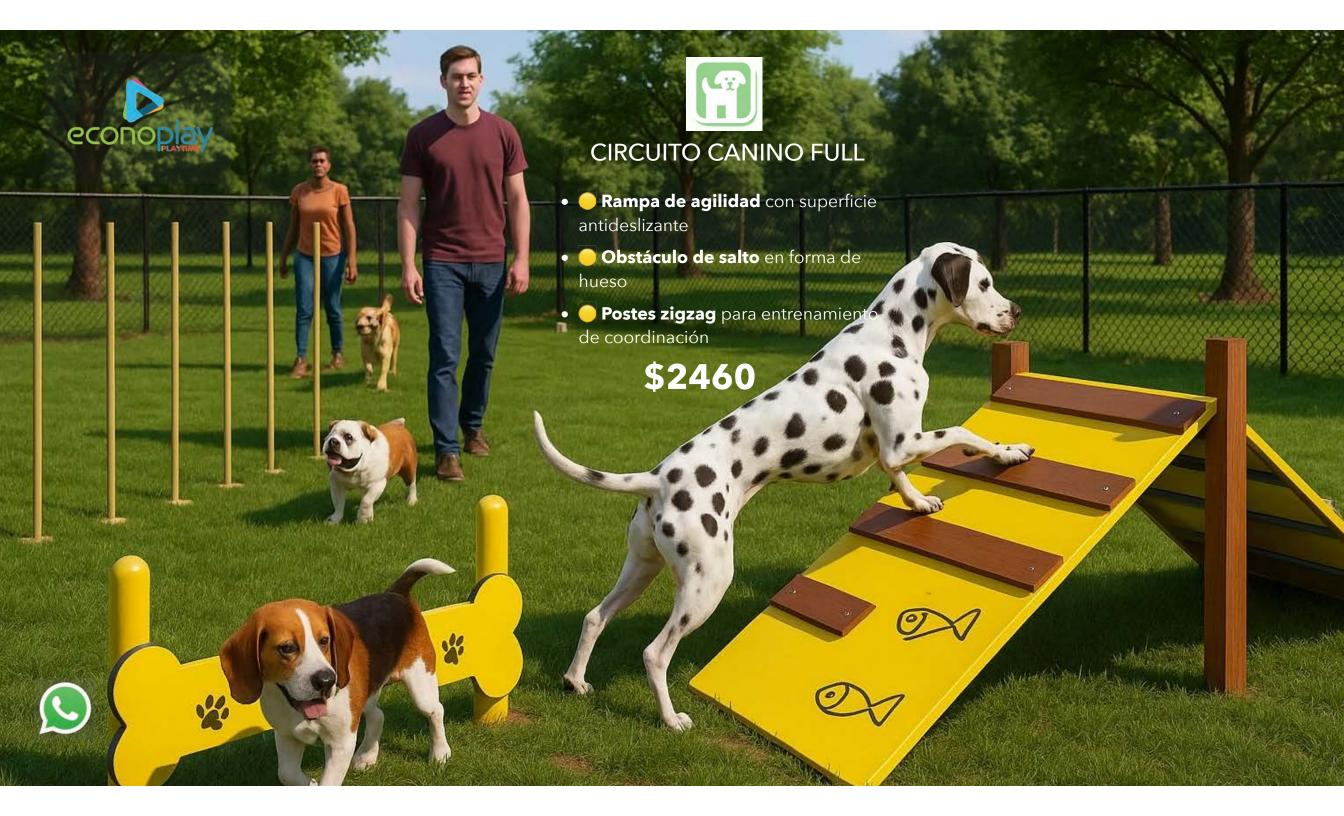


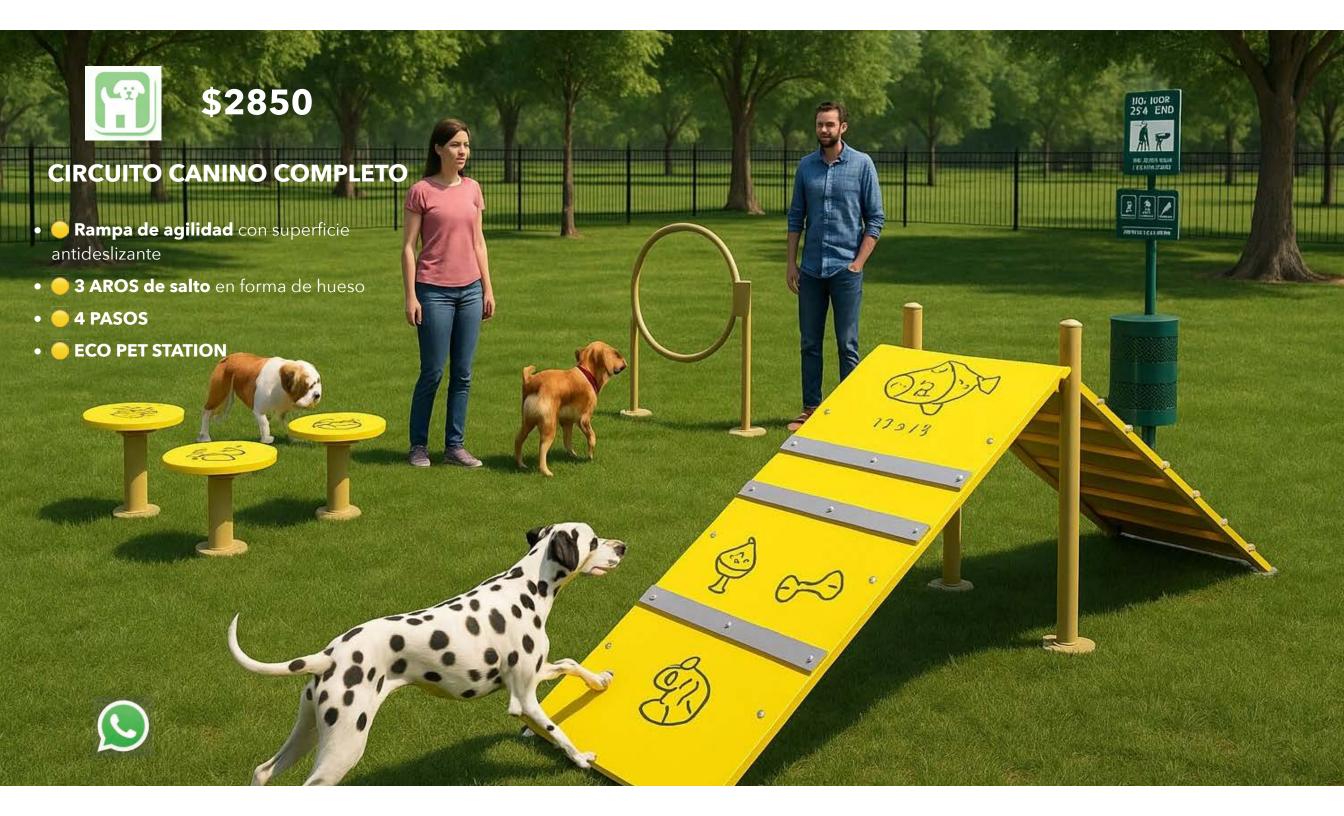

#### **ECO PET STATION**

Estación para desechos de mascotas ECO PET incluye letrero, dispensador, basureros de aluminio, rollos de bolsa y bolsas de basura con revestimiento, verde bosque completo

\$275

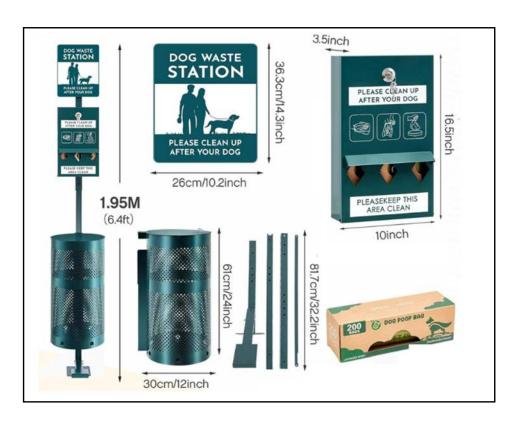





## DISPENSADOR MASCOTA

Estación para mascotas DOGIPOT 1003A-L incluye letrero, dispensador, receptáculo de aluminio, rollos de bolsa de arena y bolsas de basura con revestimiento, verde bosque o negro









incluye 50 bolsas de basura y 400 bolsas para desechos





## BEST IN SHOW

## **BARK-BSTKIT-Natural**

BarkPark's Best in Show Course includes everything you need to complete your dog park, including a Sit & Stay Bench, Receptacle, and pet waste station.





# COMBINATION

## **BARK-CMBKIT-Natural**

BarkPark's Combination Course is the perfect solution for parks planning to have a large and small dog areas.





## EXPERT

## **BARK-XPKIT-Natural**

Our most advanced course offers nine (9) activities meeting the needs of dogs of various sizes and abilities.





# INTERMEDIATE

## **BARK-ITKIT-Natural**

BarkPark's Intermediate course offers six (6) traditional agility activities to create an attractive dog play area in any park, public space, or pet care facility.





# NOVICE

## **BARK-NVKIT-Natural**

Our best selling Novice Course includes four (4) entry level activities that are great for dogs of all abilities.





# RECYCLED INTERMEDIATE

## **BARK-KIT01**

BarkPark's Recycled Intermediate course offers six (6) recycled agility activities to create an attractive dog play area in any park, public space, or pet care facility.





# RECYCLED SMALL DOG

## **BARK-KIT04**

BarkPark's Recycled Small Dog Course features several agility obstacles that are sized perfectly for smaller breed dogs of all abilities.






# SMALL DOG

## **BARK-SMKIT-Natural**

The Small Dog Course features the small dog hoop jump that is shorter to the ground and features smaller hoops that are just the right size for teacups and terriers.

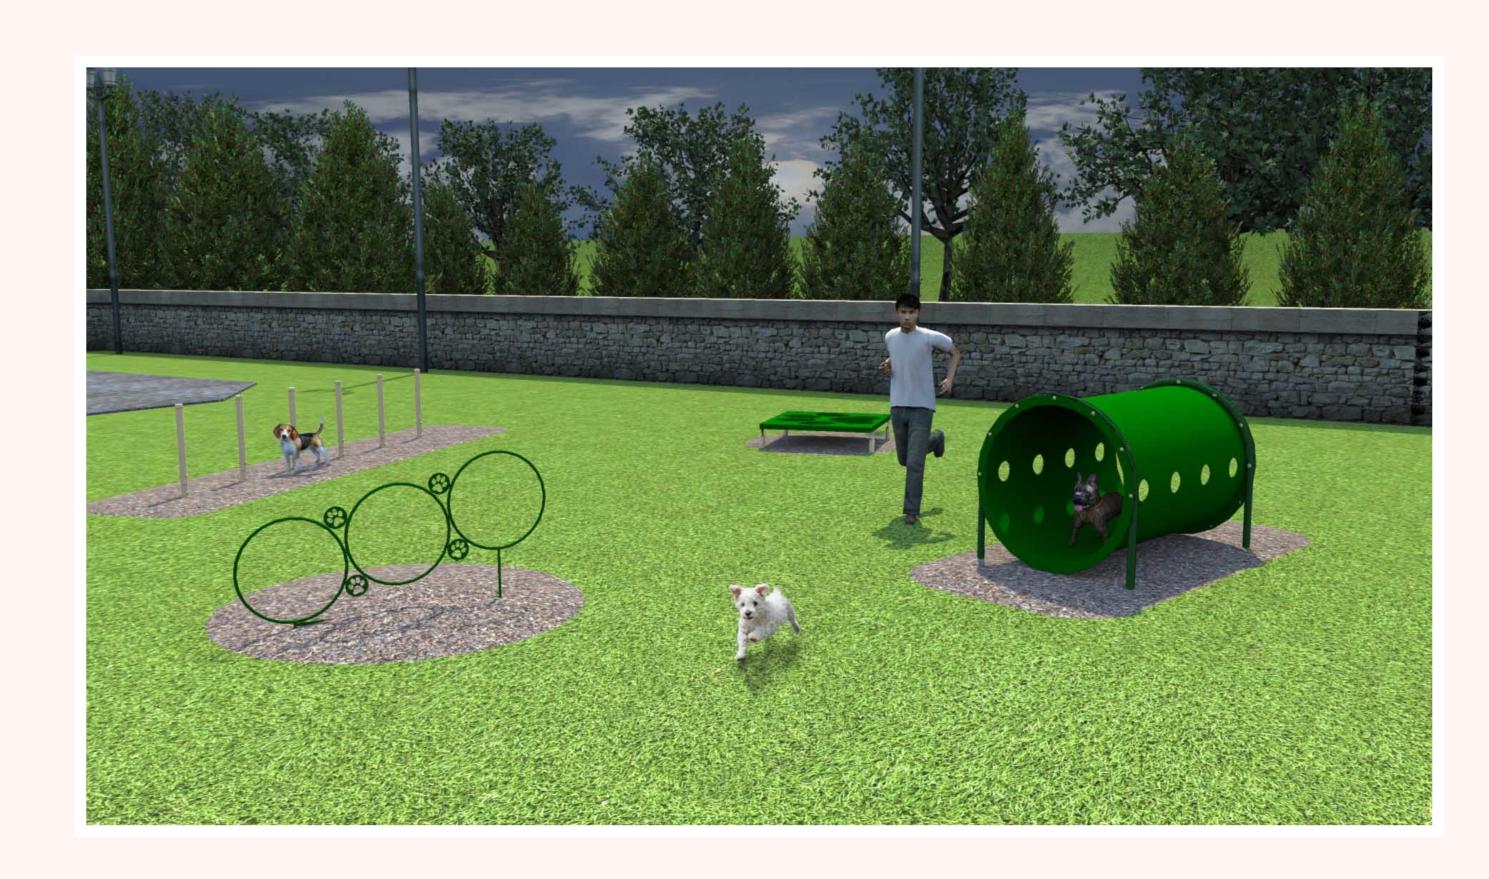





## PLANTIME parques caninos



#### STARTER KIT

El PARQUE CANINO de DOGIPARK para principiantes es un kit de 7 piezas que incluye el aro de salto con forma de perro de tres niveles DOGIPARK, huesos arqueados, receptáculo de basura con temática de perro de acero, banco de huesos con temática de perro de acero, mesa de hueso rectangular, poste de correa de hueso y boca de incendios decorativa.

The Starter DOGIPARK Playground for Dogs is a 7 piece kit which includes the DOGIPARK Three Level Dog Shaped Jump Hoop, Arched Stepping Bones, Steel Dog Themed Trash Receptacle, Steel Dog Themed Bones Bench, Rectangle Bone Table, the Bone Leash Post and Decorative Fire Hydrant.

Precio: \$5,464.48

#7501-Starter





#### STARTER KIT - DV

+4 VALETS

El patio de juegos para perros DOGIPARK para principiantes **DV** es un kit de 7 piezas que incluye el aro de salto con forma de perro de tres niveles DOGIPARK, huesos arqueados, receptáculo de basura con temática de perro de acero, banco de huesos con temática de perro de acero, mesa de hueso rectangular, poste de correa de hueso y boca de incendios decorativa. También se incluyen (4) cuatro DOGIPOT Poly DOGVALET.

The Starter DOGIPARK Playground for Dogs is a 7 piece kit which includes the DOGIPARK Three Level Dog Shaped Jump Hoop, Arched Stepping Bones, Steel Dog Themed Trash Receptacle, Steel Dog Themed Bones Bench, Rectangle Bone Table, the Bone Leash Post and Decorative Fire Hydrant. Also included are (4) four DOGIPOT Poly DOGVALETs.



Precio: \$8,956.00





#### STARTER KIT - PS

+4 STATIONS

El PARQUE CANINO de DOGIPARK para principiantes **PS** es un kit de 7 piezas que incluye el aro de salto con forma de perro de tres niveles DOGIPARK, huesos arqueados, receptáculo de basura con temática de perro de acero, banco de huesos con temática de perro de acero, mesa de hueso rectangular, poste de correa de hueso y boca de incendios decorativa. También se incluyen (4) cuatro estaciones para mascotas DOGIPOT de aluminio/acero.


The Starter DOGIPARK Playground for Dogs is a 7 piece kit which includes the DOGIPARK Three Leve Dog Shaped Jump Hoop, Arched Stepping Bones, Steel Dog Themed Trash Receptacle, Steel Dog Themed Bones Bench, Rectangle Bone Table, the Bone Leash Post and Decorative Fire Hydrant. Also included are (4) four DOGIPOT Aluminum/Steel Pet Stations.

Precio: \$9,280.00

#7501-Starter-PS





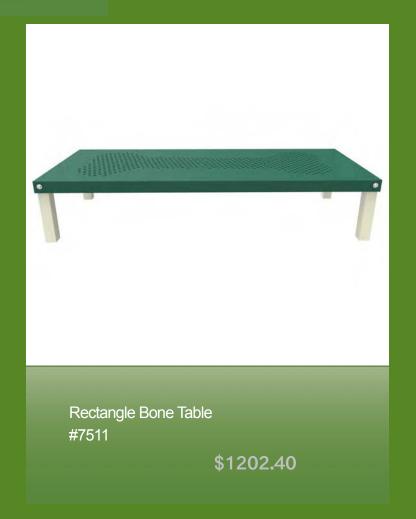








Steel Dog Themed Bones Bench

#7711

\$1,120

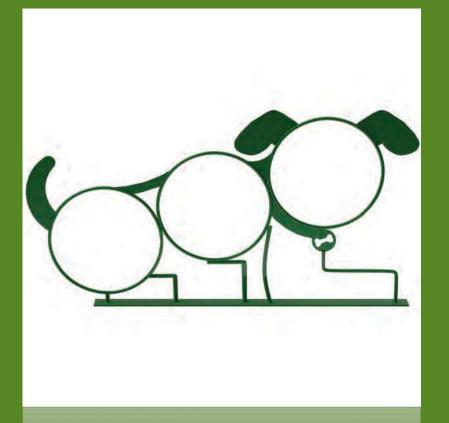

Three Level Dog Shaped Jump Hoop

\$1,112.80
















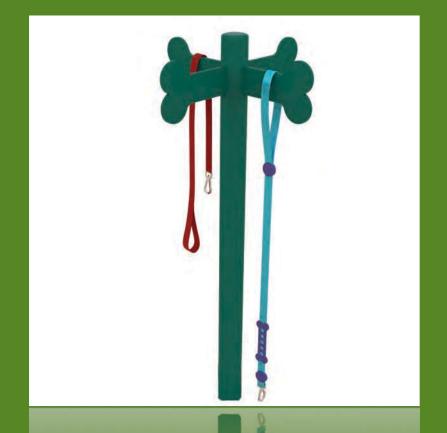

Bone Leash Post #7732

\$442.40

DOGIPARK®
The Smart Dog Park Solution.

800.364.7681

www.DOGIPARK.com

#### **\$**PLAYGROUNDS FOR DOGS™

## RECTANGLE BONE TABLE (ITEM #7511) SPECIFICATION AND INSTALLATION SHEET

#### YOUR & PLAYGROUNDS FOR DOGS RECTANGLE BONE TABLE INCLUDES:



- 1 Rectangle bone table with **RUFFCOAT™** protective, slip resistant coating
- 4 black powder coated in-ground mounting bases
- Mounting hardware (16) 1¼" x 5/16" bolts, (32) 5/16" washers & (16) 5/16" nuts

#### PLEASE CHECK THE ABOVE INVENTORY AND CALL YOUR DISTRIBUTOR IF ANY PARTS ARE MISSING.

#### **INSTALLATION AND OPERATION INSTRUCTIONS**

- 1. Select a good level spot to install
- 2. Assemble the in-ground mount bases to the rectangle bone table base legs with included hardware.
- 3. Dig 4 holes 18" deep using the table legs with attached in-ground mounting base to determine the exact distance between each of the 4 holes. We suggest using a fast setting concrete for the best results.
- 4. We recommend adding mulch around the footers and under and around table.

Surface mounting – please surface mount per your requirements using your own hardware.

#### **PRODUCT DETAILS:**


Dimensions: 60"L x 24"W x 12"H

**Surfaces:** 

#### RUFFCOAT™

- Table surface 11 gauge steel and 13 gauge 4x4 legs
- Maximum weight holds up to 500lbs
- Copolymer-based, environmentally safe
- Does not fade, crack or peel
- Applied at a thickness of 25-30 mils.
- 5 year warranty on coating
- Total weight 135 lbs.



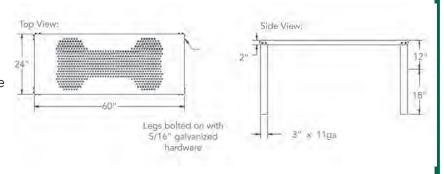



#### **\$\$**PLAYGROUNDS FOR DOGS™

#### **RECTANGLE BONE TABLE (ITEM #7511)**

#### SPECIFICATION AND INSTALLATION SHEET





#### **SAFETY WARNINGS AND EQUIPMENT MAINTENANCE RECOMMENDATIONS**

- PLEASE READ THESE IMPORTANT SAFETY WARNINGS AND KEEP ON FILE FOR FUTURE REFERENCE REGARDING INSPECTION REMINDERS AND LIST OF PARTS.
- Follow installation instructions and find a safe, suitable location for equipment use.
- All products should be in-ground or surface mounted and securely fastened to concrete. Concrete footers should never protrude above the ground where
  they are exposed and could create a safety hazard. Ground covering, such as mulch, is recommended over the buried footers and under an around the
- table.
- Regular scheduled review of equipment should be conducted to ensure there is no existing damage caused by wear and tear, improper use or vandalism.
- All equipment should be free from rust or other structural damage. Replace or repair in the event any rust exists that could affect the structural integrity of
  the equipment.
- Any areas where the coating has been removed should be repainted to deter rusting or other damage.
- · Any protruding bolts, rough or sharp edges should be covered, capped or removed. Inspect for broken, bent or worn pieces and replace if present.
- Never add components not intended for this equipment. **EQUIPMENT IS NOT INTENDED FOR USE BY PEOPLE. THE EQUIPMENT IS SOLELY INTENDED AND DESIGNED FOR DOG USE ONLY.**
- Proper and regular maintenance of equipment includes, but is not limited to, inspection of footings, all bolts and connection points, edges, landing areas, coatings and surfaces. This includes regular tightening of bolts, nuts and screws.
- ANY WORN OR BROKEN PARTS, BOLTS, NUTS, SCREWS, INSTABILITY IN THE FOOTERS AND THE LIKE SHOULD BE REPLACED IMMEDIATELY TO
  PREVENT ANY INJURY.

#### WARRANTY

**DOGIPOT®** warrants to the original consumer purchaser that our **DOGIPARK®** brand products will be free from defects in material workmanship under normal use for a period of two (2) years from the date of purchase when installed and maintained properly.

**DOGIPOT®** may elect to repair or replace any defective **DOGIPARK®** product covered by our warranty. Our warranty does not cover defects caused by misuse, abuse, vandalism, negligence, alterations, environmental conditions, extreme weather conditions, manmade or natural disasters, lack of maintenance, improper installation, storage or handling or normal wear and tear from use.

DOGIPOT® provides a limited warranty for the RUFFCOAT™ and Thermoplastic coated elements for 5 years.

Damages or loss in transit is the responsibility of the carrier, whether visible or concealed. It is the responsibility of the recipient to ensure that the order is received both complete and without damages. Before signing receipt, inspect the shipment immediately and completely. Note any damages or shortages on the bill of lading. Damage reports must be filed within ten (10) days. **DOGIPOT®** is not responsible for lost damages or loss in transit. Title to all goods passes to the customer at the time of shipment. **DOGIPOT®** will assist in filing claims if the freight arrangement was made by **DOGIPOT®** at your request. Cancellations and returns are only accepted with the approval of **DOGIPOT®**. No equipment shall be returned without a Return Materials Authorization which is issued by customer service. Any returned equipment must be returned in the original packaging and wrapped and stuffed to avoid damage, or in a similar suitable condition. A restocking charge of up to 25% will be applied to all returned goods when the error is not that of **DOGIPOT®**. The customer is responsible for all freight charges to return any equipment.

DOG PARK®

The Smart Dog Park Solution.

800.364.7681

www.DOGIPARK.com

#### **\$\$PLAYGROUNDS FOR DOGS™**

## ARCHED STEPPING BONES (ITEM# 7521) SPECIFICATION AND INSTALLATION SHEET



#### YOUR **\***PLAYGROUNDS FOR DOGS™ ARCHED STEPPING BONES INCLUDES:

- 5 bone steps with **RUFFCOAT™** protective, slip resistant coating
- 1 beige powder coated base
- 1 black powder coated in-ground mounting base
- Mounting hardware (26) 1¼" x 5/16" bolts, (52) 5/16" washers & (26) 5/16" nuts

#### PLEASE CHECK THE ABOVE INVENTORY AND CALL YOUR DISTRIBUTOR IF ANY PARTS ARE MISSING.

#### **INSTALLATION AND OPERATION INSTRUCTIONS**

- 1. Select a good level spot to install
- 2. Assemble the in-ground mount base to the arched stepping bones base with included hardware.
- 3. Dig 3 holes 18" deep using the attached in-ground mounting bases to determine the exact distance between each of the 3 holes. We suggest using a fast setting concrete for the best results. We recommend adding mulch around the footers and equipment.

Surface mounting – please surface mount per your requirements using your own hardware.

#### **PRODUCT DETAILS:**

Dimensions: 84"L x 24"H x 16" D


**Surfaces:** 

- RUFFCOAT™
- Tube frame and steps 11 gauge steel on the steps with 2.375"
   13 gauge steel tubing frame
- Copolymer-based, environmentally safe
- Does not fade, crack or peel or warp
- Applied at a thickness of 25-30 mils.
- 5 year warranty on coating

#### **Understructure Surfaces:**

- Beige powder coated steel
- Total weight 155 lbs.
- Holds up to 200 lbs. maximum weight



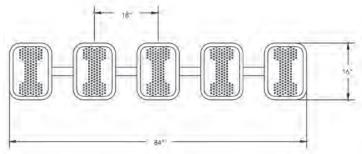




#### **\* PLAYGROUNDS FOR DOGS™**

## ARCHED STEPPING BONES (ITEM# 7521) SPECIFICATION AND INSTALLATION SHEET





#### SAFETY WARNINGS AND EQUIPMENT MAINTENANCE RECOMMENDATIONS

- PLEASE READ THESE IMPORTANT SAFETY WARNINGS AND KEEP ON FILE FOR FUTURE REFERENCE REGARDING INSPECTION REMINDERS AND LIST OF PARTS.
- Follow installation instructions and find a safe, suitable location for equipment use.
- All products should be in-ground or surface mounted and securely fastened to concrete. Concrete footers should never protrude above the ground where
  they are exposed and could create a safety hazard. Ground covering, such as mulch, is recommended over the buried footers.
- Regular scheduled review of equipment should be conducted to ensure there is no existing damage caused by wear and tear, improper use or vandalism.
- All equipment should be free from rust or other structural damage. Replace or repair in the event any rust exists that could affect the structural integrity of
  the equipment.
- Any areas where the coating has been removed should be repainted to deter rusting or other damage.
- Any protruding bolts, rough or sharp edges should be covered, capped or removed. Inspect for broken, bent or worn pieces and replace if present.
- Never add components not intended for this equipment. **EQUIPMENT IS NOT INTENDED FOR USE BY PEOPLE. THE EQUIPMENT IS SOLELY INTENDED AND DESIGNED FOR DOG USE ONLY.**
- Proper and regular maintenance of equipment includes, but is not limited to, inspection of footings, all bolts and connection points, edges, landing areas, coatings and surfaces. This includes regular tightening of bolts, nuts and screws.
- ANY WORN OR BROKEN PARTS, BOLTS, NUTS, SCREWS, INSTABILITY IN THE FOOTERS AND THE LIKE SHOULD BE REPLACED IMMEDIATELY TO
  PREVENT ANY INJURY.

#### WARRANTY

**DOGIPOT®** warrants to the original consumer purchaser that our **DOGIPARK®** brand products will be free from defects in material workmanship under normal use for a period of two (2) years from the date of purchase when installed and maintained properly.

**DOGIPOT®** may elect to repair or replace any defective **DOGIPARK®** product covered by our warranty. Our warranty does not cover defects caused by misuse, abuse, vandalism, negligence, alterations, environmental conditions, extreme weather conditions, manmade or natural disasters, lack of maintenance, improper installation, storage or handling or normal wear and tear from use.

**DOGIPOT**® provides a limited warranty for the **RUFFCOAT**™ and Thermoplastic coated elements for 5 years.

Damages or loss in transit is the responsibility of the carrier, whether visible or concealed. It is the responsibility of the recipient to ensure that the order is received both complete and without damages. Before signing receipt, inspect the shipment immediately and completely. Note any damages or shortages on the bill of lading. Damage reports must be filed within ten (10) days. **DOGIPOT®** is not responsible for lost damages or loss in transit. Title to all goods passes to the customer at the time of shipment. **DOGIPOT®** will assist in filing claims if the freight arrangement was made by **DOGIPOT®** at your request. Cancellations and returns are only accepted with the approval of **DOGIPOT®**. No equipment shall be returned without a Return Materials Authorization which is issued by customer service. Any returned equipment must be returned in the original packaging and wrapped and stuffed to avoid damage, or in a similar suitable condition. A restocking charge of up to 25% will be applied to all returned goods when the error is not that of **DOGIPOT®**. The customer is responsible for all freight charges to return any equipment.

DOG PARK®


The Smart Dog Park Solution.

800.364.7681

www.DOGIPARK.com

#### **PLAYGROUNDS FOR DOGS™**

## 3 LEVEL DOG SHAPED JUMP HOOP (ITEM #7522) SPECIFICATION AND INSTALLATION SHEET



#### YOUR **\***PLAYGROUNDS FOR DOGS<sup>™</sup> 3 LEVEL DOG SHAPED JUMP HOOP INCLUDES:

- Thermo plastic coated dog shaped jump
- 2 green powder coated in-ground mounting posts
- Mounting hardware (4) 1¼" x 5/16" bolts, (8) 5/16" washers &
   (4) 5/16" Nuts

#### PLEASE CHECK THE ABOVE INVENTORY AND CALL YOUR DISTRIBUTOR IF ANY PARTS ARE MISSING.

#### INSTALLATION AND OPERATION INSTRUCTIONS

- 1. Select a good level spot to install
- 2. Assemble the in-ground mount bases to the dog shaped jump base with included hardware.
- 3. Dig 2 holes 18" deep using the attached the in-ground mounting bases to determine the exact distance between each of the 2 holes. We suggest using a fast setting concrete for the best results.
- 4. We recommend adding mulch around the footers and equipment.

Surface mounting – please surface mount per your requirements using your own hardware.


#### **PRODUCT DETAILS:**

**Dimensions:**  $80^{\circ\prime}\text{W} \times 42^{\circ\prime}\text{H}$ 

**Surfaces:** 

- Thermoplastic coated
- Copolymer-based, environmentally safe
- Does not fade, crack or peel
- 2 ¼" diameter solid steel rod
- Applied at a thickness of 25-30 mils.
- 5 year warranty on coating
- Total weight 80 lbs.



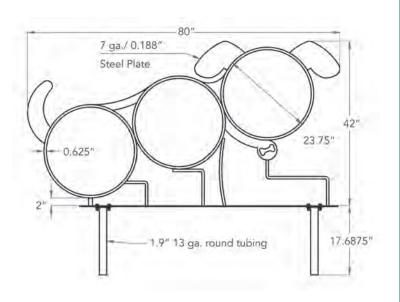



#### **\***PLAYGROUNDS FOR DOGS™

#### 3 LEVEL DOG SHAPED JUMP HOOP (ITEM #7522)

#### SPECIFICATION AND INSTALLATION SHEET



#### SAFETY WARNINGS AND EQUIPMENT MAINTENANCE RECOMMENDATIONS

- PLEASE READ THESE IMPORTANT SAFETY WARNINGS AND KEEP ON FILE FOR FUTURE REFERENCE REGARDING INSPECTION REMINDERS
  AND LIST OF PARTS.
- Follow installation instructions and find a safe, suitable location for equipment use.
- All products should be in-ground or surface mounted and securely fastened to concrete. Concrete footers should never protrude above the ground where
  they are exposed and could create a safety hazard. Ground covering, such as mulch, is recommended over the buried footers.
- Regular scheduled review of equipment should be conducted to ensure there is no existing damage caused by wear and tear, improper use or vandalism.
- All equipment should be free from rust or other structural damage. Replace or repair in the event any rust exists that could affect the structural integrity of the equipment.
- · Any areas where the coating has been removed should be repainted to deter rusting or other damage.
- Any protruding bolts, rough or sharp edges should be covered, capped or removed. Inspect for broken, bent or worn pieces and replace if present.
- Never add components not intended for this equipment. EQUIPMENT IS NOT INTENDED FOR USE BY PEOPLE. THE EQUIPMENT IS SOLELY INTENDED AND DESIGNED FOR DOG USE ONLY.
- Proper and regular maintenance of equipment includes, but is not limited to, inspection of footings, all bolts and connection points, edges, landing areas, coatings and surfaces. This includes regular tightening of bolts, nuts and screws.
- ANY WORN OR BROKEN PARTS, BOLTS, NUTS, SCREWS, INSTABILITY IN THE FOOTERS AND THE LIKE SHOULD BE REPLACED IMMEDIATELY TO
  PREVENT ANY INJURY.

#### WARRANTY

**DOGIPOT®** warrants to the original consumer purchaser that our **DOGIPARK®** brand products will be free from defects in material workmanship under normal use for a period of two (2) years from the date of purchase when installed and maintained properly.

**DOGIPOT®** may elect to repair or replace any defective **DOGIPARK®** product covered by our warranty. Our warranty does not cover defects caused by misuse, abuse, vandalism, negligence, alterations, environmental conditions, extreme weather conditions, manmade or natural disasters, lack of maintenance, improper installation, storage or handling or normal wear and tear from use.

**DOGIPOT®** provides a limited warranty for the **RUFFCOAT™** and Thermoplastic coated elements for 5 years.

Damages or loss in transit is the responsibility of the carrier, whether visible or concealed. It is the responsibility of the recipient to ensure that the order is received both complete and without damages. Before signing receipt, inspect the shipment immediately and completely. Note any damages or shortages on the bill of lading. Damage reports must be filed within ten (10) days. **DOGIPOT®** is not responsible for lost damages or loss in transit. Title to all goods passes to the customer at the time of shipment. **DOGIPOT®** will assist in filing claims if the freight arrangement was made by **DOGIPOT®** at your request. Cancellations and returns are only accepted with the approval of **DOGIPOT®**. No equipment shall be returned without a Return Materials Authorization which is issued by customer service. Any returned equipment must be returned in the original packaging and wrapped and stuffed to avoid damage, or in a similar suitable condition. A restocking charge of up to 25% will be applied to all returned goods when the error is not that of **DOGIPOT®**. The customer is responsible for all freight charges to return any equipment.

DOGIPARK®
The Smart Dog Park Solution.

800.364.7681

www.DOGIPARK.com

#### **\***PLAYGROUNDS FOR DOGS™

### PARK BONE BENCH (ITEM# 7711) SPECIFICATION AND INSTALLATION SHEET

#### YOUR **#PLAYGROUNDS FOR DOGS™ PARK BONE BENCH INCLUDES:**




- 1 thermoplastic coated green with bone cut outs back rest.
- 1 thermoplastic coated green seat
- 2 powder coated black bench frames
- 2 powder coated black bench supports
- 4 powder coated black in ground mounting J-Rods
- Mounting hardware (19) 1&¼" x 5/16" bolts, (38) 5/16" washers & (19) 5/16" nuts


#### PLEASE CHECK THE ABOVE INVENTORY AND CALL YOUR DISTRIBUTOR IF ANY PARTS ARE MISSING.


#### **INSTALLATION AND OPERATION INSTRUCTIONS**

- 1. Select a good level spot to install.
- 2. Assemble the frame to the seat and backrest, next assemble the J-Rods through each of the 4" holes
- 3. Dig 4 holes 18" deep using the J-Rods to determine the exact distance between each of the 4 holes. We suggest using a fast setting concrete for the best results.
- 4. We recommend adding mulch around the footers.

Surface mounting – please surface mount per your requirements using your own hardware.













#### **\*** PLAYGROUNDS FOR DOGS™

PARK BONE BENCH (ITEM# 7711)

#### SPECIFICATION AND INSTALLATION SHEET



#### **PRODUCT DETAILS:**

**Dimensions:** 32.5"H x 72"W x 24"D **Surface:** 

- Copolymer-based, environmentally safe
- Does not fade, crack or peel
- Both the bench and leg sets 11 gauge steel on the steps with 2.375" 13 gauge steel tubing frame
- Applied at a thickness of 25-30 mils.
- 5 year warranty on coating
- Total weight 130 lbs.
- Holds up to 750 lbs. maximum weight

**Legs**: Tubular legs and understructure parts are made from galvanized steel and are finished with black powder coating.

#### **SAFETY WARNINGS AND EQUIPMENT MAINTENANCE RECOMMENDATIONS**

- PLEASE READ THESE IMPORTANT SAFETY WARNINGS AND KEEP ON FILE FOR FUTURE REFERENCE REGARDING INSPECTION REMINDERS AND LIST OF PARTS.
- Follow installation instructions and find a safe, suitable location for equipment use.
- All products should be in-ground or surface mounted and securely fastened to concrete. Concrete footers should never protrude above the ground where
  they are exposed and could create a safety hazard. Ground covering, such as mulch, is recommended over the buried footers.
- · Regular scheduled review of equipment should be conducted to ensure there is no existing damage caused by wear and tear, improper use or vandalism.
- All equipment should be free from rust or other structural damage. Replace or repair in the event any rust exists that could affect the structural integrity of the equipment.
- Any areas where the coating has been removed should be repainted to deter rusting or other damage.
- · Any protruding bolts, rough or sharp edges should be covered, capped or removed. Inspect for broken, bent or worn pieces and replace if present.
- Never add components not intended for this equipment. EQUIPMENT IS NOT INTENDED FOR USE BY PEOPLE. THE EQUIPMENT IS SOLELY INTENDED AND DESIGNED FOR DOG USE ONLY.
- Proper and regular maintenance of equipment includes, but is not limited to, inspection of footings, all bolts and connection points, edges, landing areas, coatings and surfaces. This includes regular tightening of bolts, nuts and screws.
- ANY WORN OR BROKEN PARTS, BOLTS, NUTS, SCREWS, INSTABILITY IN THE FOOTERS AND THE LIKE SHOULD BE REPLACED IMMEDIATELY TO
  PREVENT ANY INJURY.

#### WARRANTY

**DOGIPOT®** warrants to the original consumer purchaser that our **DOGIPARK®** brand products will be free from defects in material workmanship under normal use for a period of two (2) years from the date of purchase when installed and maintained properly.

**DOGIPOT®** may elect to repair or replace any defective **DOGIPAK®** product covered by our warranty. Our warranty does not cover defects caused by misuse, abuse, vandalism, negligence, alterations, environmental conditions, extreme weather conditions, manmade or natural disasters, lack of maintenance, improper installation, storage or handling or normal wear and tear from use.

DOGIPOT® provides a limited warranty for the RUFFCOAT™ and Thermoplastic coated elements for 5 years.

Damages or loss in transit is the responsibility of the carrier, whether visible or concealed. It is the responsibility of the recipient to ensure that the order is received both complete and without damages. Before signing receipt, inspect the shipment immediately and completely. Note any damages or shortages on the bill of lading. Damage reports must be filed within ten (10) days. **DOGIPOT®** is not responsible for lost damages or loss in transit. Title to all goods passes to the customer at the time of shipment. **DOGIPOT®** will assist in filing claims if the freight arrangement was made by **DOGIPOT®** at your request. Cancellations and returns are only accepted with the approval of **DOGIPOT®**. No equipment shall be returned without a Return Materials Authorization which is issued by customer service. Any returned equipment must be returned in the original packaging and wrapped and stuffed to avoid damage, or in a similar suitable condition. A restocking charge of up to 25% will be applied to all returned goods when the error is not that of **DOGIPOT®**. The customer is responsible for all freight charges to return any equipment.



#### **\*** PLAYGROUNDS FOR DOGS™

#### **STEEL TRASH RECEPTACLE (ITEM #7721)** SPECIFICATION AND INSTALLATION SHEET



#### YOUR **PLAYGROUNDS** FOR DOGS™ STEEL TRASH RECEPTACLE INCLUDES:


- 1 Thermo plastic coated green steel trash receptacle
- 1 Thermo plastic coated black spun metal lid
- 1 32 gallon plastic receptacle liner
- 1 Roll of **DOGIPOT**® 33 gallon liner trash bags 25 count (Item #1404M)
- 1 Black powder coated in-ground mounting base
- Mounting hardware (4) 1¼" x 5/16" bolts, (8) 5/16" washers & (4) 5/16" Nuts

#### PLEASE CHECK THE ABOVE INVENTORY AND CALL YOUR DISTRIBUTOR IF ANY PARTS ARE MISSING.

#### INSTALLATION AND OPERATION INSTRUCTIONS

- 1. Select a good level spot to install
- 2. Assemble the in-ground mount base to the steel trash receptacle
- 3. Dig 1 hole 18" deep to fit the in-ground mounting base. We suggest using a fast setting concrete for the best results.
- 4. We recommend adding mulch around the footers

Surface mounting – please surface mount per your requirements using your own hardware.





#### **PRODUCT DETAILS:**

Dimensions 23.5"Dia. x 28.625" Height

#### **Surfaces:**

- 11 gauge steel
- Thermoplastic coated
- Copolymer-based, environmentally safe
- Does not fade, crack or peel
- Applied at a thickness of 25-30 mils.
- 5 year warranty on coating
- Total Weight 105 lbs.





Receptacle 2 types of bottoms





#### **₩**PLAYGROUNDS FOR DOGS™

### STEEL TRASH RECEPTACLE (ITEM# 7721) SPECIFICATION AND INSTALLATION SHEET



#### SAFETY WARNINGS AND EQUIPMENT MAINTENANCE RECOMMENDATIONS

- PLEASE READ THESE IMPORTANT SAFETY WARNINGS AND KEEP ON FILE FOR FUTURE REFERENCE REGARDING INSPECTION REMINDERS
  AND LIST OF PARTS.
- Follow installation instructions and find a safe, suitable location for equipment use.
- All products should be in-ground or surface mounted and securely fastened to concrete. Concrete footers should never protrude above the ground where they are exposed and could create a safety hazard. Ground covering, such as mulch, is recommended over the buried footers.
- Regular scheduled review of equipment should be conducted to ensure there is no existing damage caused by wear and tear, improper use or vandalism.
- All equipment should be free from rust or other structural damage. Replace or repair in the event any rust exists that could affect the structural integrity of the equipment.
- Any areas where the coating has been removed should be repainted to deter rusting or other damage.
- · Any protruding bolts, rough or sharp edges should be covered, capped or removed. Inspect for broken, bent or worn pieces and replace if present.
- Never add components not intended for this equipment. EQUIPMENT IS NOT INTENDED FOR USE BY PEOPLE. THE EQUIPMENT IS SOLELY INTENDED AND DESIGNED FOR DOG USE ONLY.
- Proper and regular maintenance of equipment includes, but is not limited to, inspection of footings, all bolts and connection points, edges, landing areas, coatings and surfaces. This includes regular tightening of bolts, nuts and screws.
- ANY WORN OR BROKEN PARTS, BOLTS, NUTS, SCREWS, INSTABILITY IN THE FOOTERS AND THE LIKE SHOULD BE REPLACED IMMEDIATELY TO
  PREVENT ANY INJURY.

#### WARRANTY

**DOGIPOT®** warrants to the original consumer purchaser that our **DOGIPARK®** brand products will be free from defects in material workmanship under normal use for a period of two (2) years from the date of purchase when installed and maintained properly.

**DOGIPARK®** product covered by our warranty. Our warranty does not cover defects caused by misuse, abuse, vandalism, negligence, alterations, environmental conditions, extreme weather conditions, manmade or natural disasters, lack of maintenance, improper installation, storage or handling or normal wear and tear from use.

**DOGIPOT®** provides a limited warranty for the **RUFFCOAT™** and Thermoplastic coated elements for 5 years.

Damages or loss in transit is the responsibility of the carrier, whether visible or concealed. It is the responsibility of the recipient to ensure that the order is received both complete and without damages. Before signing receipt, inspect the shipment immediately and completely. Note any damages or shortages on the bill of lading. Damage reports must be filed within ten (10) days. **DOGIPOT®** is not responsible for lost damages or loss in transit. Title to all goods passes to the customer at the time of shipment. **DOGIPOT®** will assist in filing claims if the freight arrangement was made by **DOGIPOT®** at your request. Cancellations and returns are only accepted with the approval of **DOGIPOT®**. No equipment shall be returned without a Return Materials Authorization which is issued by customer service. Any returned equipment must be returned in the original packaging and wrapped and stuffed to avoid damage, or in a similar suitable condition. A restocking charge of up to 25% will be applied to all returned goods when the error is not that of **DOGIPOT®**. The customer is responsible for all freight charges to return any equipment.

DOG PARK®

The Smart Dog Park Solution.

800.364.7681

www.DOGIPARK.com

#### **₩PLAYGROUNDS FOR DOGS**

## FIRE HYDRANT (ITEM #7731) SPECIFICATION AND INSTALLATION SHEET

#### YOUR \*PLAYGROUNDS FOR DOGS DECORATIVE FIRE HYDRANT INCLUDES:

- 1 Red decorative fire hydrant
- 4 Red powder coated in-ground mounting J-rods

PLEASE CHECK THE ABOVE INVENTORY AND CALL YOUR DISTRIBUTOR IF ANY PARTS ARE MISSING.

#### INSTALLATION AND OPERATION INSTRUCTIONS

- 1 Find the desired location that is flat and accessible on all sides for dogs to enjoy the Decorative DOGIPARK® Fire Hydrant. It is recommended to remove any sod around the Fire Hydrant so that it can be installed on a flat area and surrounded by mulch.
- 2. Mark the location of the (4) four holes on the ground where the ground mount installation j-rods will be inserted into the ground through the base of the fire hydrant.
- 3. Use a broom stick, tomato, ground stake or similar items to pound into the ground to create 4 holes approximately 2-3" wide and 14" deep for the j-rods to be inserted.
- 4. Lay the fire hydrant on the ground sideways and slide each j-rod into each hole on the base of the fire hydrant to prepare to install into the ground.
- 5 Per the directions on the bag, pour some quick setting concrete into each hole filling them up.
- 6. Position the fire hydrant in the installation area and slide the installed j-rods into each concrete-filled hole.
- 7. The j-rods may need to be swiveled back and forth gently to get them to slide all the way down into the wet concrete filled holes If necessary, gently hammer the j-rods, into their holes. **CAUTION:** The powder coating on the top of the j-rods can be chipped and damaged if the top of the j-rods are not covered with a soft item if hammered. Proceed slowly and tap gently to ensure they are not damaged. The fire hydrant will need to set and cure per the directions on the quick setting concrete that was used.
- 8. It is recommended to surround the fire hydrant with a wood mulch to create a buffer so the landscapers maintaining the area do not hit the fire hydrant with a lawnmower or weed trimmer and so that there is no grass immediately around it that will be destroyed by the dog urine that likely will increase in the area due to the presence of the fire hydrant.
- 9. The Decorative DOGIPARK® Fire Hydrant may also be surface mounted instead of ground mounting. Surface mounting hardware has NOT be included and the j-rods will not be necessary for this type of installation. **CAUTION: DO NOT OVERTIGHTEN** any surface mounting hardware. This may damage the base of the fire hydrant.

WARNING: THIS IS A DECORATIVE FIRE HYDRANT TO ADD CHARACTER TO YOUR DOG PARK AND FOR DOGS TO ENJOY. IT IS NOT DESIGNED FOR PEOPLE TO CLIMB OR STAND ON. THIS COULD DAMAGE THE FIRE HYDRANT AND INCREASE THE CHANCE OF INJURY. DO NOT CLIMB, SIT, LEAN OR STAND ON THE FIRE HYDRANT AT ANY TIME.



#### **₩**PLAYGROUNDS FOR DOGS™

FIRE HYDRANT (ITEM #7731)

#### SPECIFICATION AND INSTALLATION SHEET



#### **PRODUCT DETAILS:**

- Made of unsaturated Poly Resin so it is light and durable
- Coated with Red Poly Urethane
   Paint to seal out urine, dirt
   and other natural surface enemies.
- 5 year warranty on coating
- Total Weight 29 lbs.

#### SAFETY WARNINGS AND EQUIPMENT MAINTENANCE RECOMMENDATIONS

- PLEASE READ THESE IMPORTANT SAFETY WARNINGS AND KEEP ON FILE FOR FUTURE REFERENCE REGARDING INSPECTION REMINDERS AND LIST OF PARTS.
- Follow installation instructions and find a safe, suitable location for equipment use.
- All products should be in-ground or surface mounted and securely fastened to concrete. Concrete footers should never protrude above the ground where they are exposed and could create a safety hazard. Ground covering, such as mulch, is recommended over the buried footers and under an around the equipment
- Regular scheduled review of equipment should be conducted to ensure there is no existing damage caused by wear and tear, improper use or vandalism.
- All equipment should be free from rust or other structural damage. Replace or repair in the event any rust exists that could affect the structural integrity of the equipment.
- Any areas where the coating has been removed should be repainted to deter rusting or other damage.
- · Any protruding bolts, rough or sharp edges should be covered, capped or removed. Inspect for broken, bent or worn pieces and replace if present.
- Never add components not intended for this equipment. EQUIPMENT IS NOT INTENDED FOR USE BY PEOPLE. THE EQUIPMENT IS SOLELY INTENDED AND DESIGNED FOR DOG USE ONLY.
- Proper and regular maintenance of equipment includes, but is not limited to, inspection of footings, all bolts and connection points, edges, landing areas, coatings and surfaces. This includes regular tightening of bolts, nuts and screws.
- ANY WORN OR BROKEN PARTS, BOLTS, NUTS, SCREWS, INSTABILITY IN THE FOOTERS AND THE LIKE SHOULD BE REPLACED IMMEDIATELY TO
  PREVENT ANY INJURY.

#### WARRANTY

**DOGIPOT®** warrants to the original consumer purchaser that our **DOGIPARK®** brand products will be free from defects in material workmanship under normal use for a period of two (2) years from the date of purchase when installed and maintained properly.

**DOGIPOT®** may elect to repair or replace any defective **DOGIPARK®** product covered by our warranty. Our warranty does not cover defects caused by misuse, abuse, vandalism, negligence, alterations, environmental conditions, extreme weather conditions, manmade or natural disasters, lack of maintenance, improper installation, storage or handling or normal wear and tear from use.

**DÖGIPOT®** provides a limited warranty for the **RUFFCOAT™** and Thermoplastic coated elements for 5 years.

Damages or loss in transit is the responsibility of the carrier, whether visible or concealed. It is the responsibility of the recipient to ensure that the order is received both complete and without damages. Before signing receipt, inspect the shipment immediately and completely. Note any damages or shortages on the bill of lading. Damage reports must be filed within ten (10) days. **DOGIPOT®** is not responsible for lost damages or loss in transit. Title to all goods passes to the customer at the time of shipment. **DOGIPOT®** will assist in filing claims if the freight arrangement was made by **DOGIPOT®** at your request. Cancellations and returns are only accepted with the approval of **DOGIPOT®**. No equipment shall be returned without a Return Materials Authorization which is issued by customer service. Any returned equipment must be returned in the original packaging and wrapped and stuffed to avoid damage, or in a similar suitable condition. A restocking charge of up to 25% will be applied to all returned goods when the error is not that of **DOGIPOT®**. The customer is responsible for all freight charges to return any equipment.

DOG PARK®

The Smart Dog Park Solution.

800.364.7681

www.DOGIPARK.com

#### **\$\$PLAYGROUNDS FOR DOGS™**

### BONE LEASH POST (ITEM# 7732) SPECIFICATION AND INSTALLATION SHEET




#### YOUR **\$PLAYGROUNDS** FOR DOGS™ BONE LEASH POST INCLUDES:

- Powder coated Green Bone leash post
- 1 Black powder coated in-ground mounting base
- Mounting hardware (4)1¼" x 5/16" bolts, (8) 5/16" washers &
   (4) 5/16" Nuts

PLEASE CHECK THE ABOVE INVENTORY AND CALL YOUR DISTRIBUTOR IF ANY PARTS ARE MISSING.

#### **INSTALLATION AND OPERATION INSTRUCTIONS**

- 1. Select a good level spot to install
- 2. Assemble the in-ground mount base to the bone leash post with included hardware.
- 3. Dig 1 hole 18" deep using the attached in-ground mounting base to determine the exact location. We suggest using a fast setting concrete for the best results.
- 4. We recommend adding mulch around the footer.
  - Surface mounting please surface mount per your requirements using your own hardware.

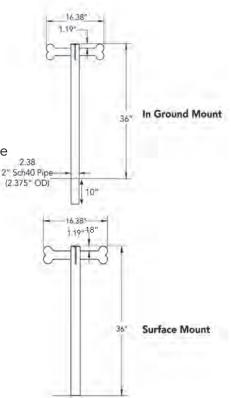





#### **PLAYGROUNDS FOR DOGS™**

**BONE LEASH POST (ITEM# 7732)** 

#### SPECIFICATION AND INSTALLATION SHEET



#### **PRODUCT DETAILS:**

#### **Dimensions:**

• 36"H x 16.38"W x 2.375"D (In Ground Mount)

#### Surface and Material:

- 2.0" Schedule 40 pipe (2.375" O.D.)
- Green powder coating
- Applied at a thickness of 25-30 mils.
- 5 year warranty on coating
- Total weight 22.98 lbs.

#### SAFETY WARNINGS AND EQUIPMENT MAINTENANCE RECOMMENDATIONS

- PLEASE READ THESE IMPORTANT SAFETY WARNINGS AND KEEP ON FILE FOR FUTURE REFERENCE REGARDING INSPECTION REMINDERS AND LIST OF PARTS.
- Follow installation instructions and find a safe, suitable location for equipment use.
- All products should be in-ground or surface mounted and securely fastened to concrete. Concrete footers should never protrude above the ground where they are exposed and could create a safety hazard. Ground covering, such as mulch, is recommended over the buried footers.
- Regular scheduled review of equipment should be conducted to ensure there is no existing damage caused by wear and tear, improper use or vandalism.
- All equipment should be free from rust or other structural damage. Replace or repair in the event any rust exists that could affect the structural integrity of the equipment.
- · Any areas where the coating has been removed should be repainted to deter rusting or other damage.
- · Any protruding bolts, rough or sharp edges should be covered, capped or removed. Inspect for broken, bent or worn pieces and replace if present.
- Never add components not intended for this equipment. EQUIPMENT IS NOT INTENDED FOR USE BY PEOPLE. THE EQUIPMENT IS SOLELY INTENDED AND DESIGNED FOR DOG USE ONLY.
- Proper and regular maintenance of equipment includes, but is not limited to, inspection of footings, all bolts and connection points, edges, landing areas, coatings and surfaces. This includes regular tightening of bolts, nuts and screws.
- ANY WORN OR BROKEN PARTS, BOLTS, NUTS, SCREWS, INSTABILITY IN THE FOOTERS AND THE LIKE SHOULD BE REPLACED IMMEDIATELY TO
  PREVENT ANY INJURY.

#### WARRANTY

**DOGIPOT®** warrants to the original consumer purchaser that our **DOGIPARK®** brand products will be free from defects in material workmanship under normal use for a period of two (2) years from the date of purchase when installed and maintained properly.

**DOGIPOT®** may elect to repair or replace any defective **DOGIPARK®** product covered by our warranty. Our warranty does not cover defects caused by misuse, abuse, vandalism, negligence, alterations, environmental conditions, extreme weather conditions, manmade or natural disasters, lack of maintenance, improper installation, storage or handling or normal wear and tear from use.

**DOGIPOT®** provides a limited warranty for the **RUFFCOAT™** and Thermoplastic coated elements for 5 years.

Damages or loss in transit is the responsibility of the carrier, whether visible or concealed. It is the responsibility of the recipient to ensure that the order is received both complete and without damages. Before signing receipt, inspect the shipment immediately and completely. Note any damages or shortages on the bill of lading. Damage reports must be filed within ten (10) days. **DOGIPOT®** is not responsible for lost damages or loss in transit. Title to all goods passes to the customer at the time of shipment. **DOGIPOT®** will assist in filing claims if the freight arrangement was made by **DOGIPOT®** at your request. Cancellations and returns are only accepted with the approval of **DOGIPOT®**. No equipment shall be returned without a Return Materials Authorization which is issued by customer service. Any returned equipment must be returned in the original packaging and wrapped and stuffed to avoid damage, or in a similar suitable condition. A restocking charge of up to 25% will be applied to all returned goods when the error is not that of **DOGIPOT®**. The customer is responsible for all freight charges to return any equipment.

800.364.7681



www.DOGIPOT.com

## ALL ALUMINUM DOGIPOT® PET STATION (ITEM #1003A-L) SPECIFICATION, INSTALLATION AND OPERATION SHEET



#### YOUR ALL ALUMINUM DOGIPOT® PET STATION INCLUDES:

- Aluminum **DOGIPOT**® Pet Sign, with mounting hardware (two (2) 2¼" x ¼" tap bolts, washers and locknuts)
- Aluminum **DOGIPOT®** JUNIOR Bag Dispenser (ITEM #1002-2), with mounting hardware (two (2) 2½" x ¼" bolts, washers and locknuts)
- Two (2) keys for Dispenser bottom locking access panel
- Two (2) rolls of DOGIPOT® Smart Litter Pick Up Bags™ (ITEM #1402) (200 count per roll), installed in DOGIPOT® JUNIOR Bag Dispenser
- 10 Gallon Aluminum Trash Receptacle (ITEM #1206A-L) with attached hinged lid and trash liner bag retainer bands, with mounting hardware (one (1) 21/2" x 1/4" and (1) 23/4" x 1/4" bolts, washers and locknuts)
- One (1) box **DOGIPOT®** Smart Liner Trash Bags™ (ITEM #1404) (50 count)

#### SEPARATE SHIPPING BOX

• 2" x 2" x 4' - 8' Galvanized Steel Telescopic Mounting Post, with installation hardware (two (2) carriage bolts  $(2\frac{1}{2}$ " x 5/16"), washers and locknuts)

#### PLEASE CHECK THE ABOVE INVENTORY AND CALL YOUR DISTRIBUTOR IF ANY PARTS ARE MISSING.

#### **INSTALLATION AND OPERATION INSTRUCTIONS**

- 1. Select a good visible spot in your community or park where you want to install the All Aluminum **DOGIPOT®** Pet Station.
- 2. Prior to installation, remove the 1%" x 1%" x 4' portion of the mounting post from the 2" x 2" x 4' portion of the mounting post before cementing. Insert the larger portion of the mounting post (2" x 2" x 4') approximately 14"

into an 18" deep by 8" diameter hole filled with a 40 lb. bag of "ready to use" concrete mix. To stabilize the post while cementing, place a rod, bolt or other device through the two bottom holes, prior to inserting into the ground and cementing. Level the post in a straight vertical position and let concrete dry for at least 12 hours.

- 3. After the concrete is dry, insert the smaller portion of the post (1¾" x 1¾" x 4′) into the larger cemented portion of the post (2′ x 2′ x 4′) until the the first 4 holes are lined up between the two posts. Use two (2) carriage bolts, washers and locknuts to fix the telescopic post in position, the upper bolt in the top overlapping hole, pointing from right to left and the lower bolt in the bottom overlapping hole, pointing from front to back. The total height above ground with both post parts should now be approximately 6″6″.
- 4. Start by installing the **DOGIPOT®** Pet Sign on top of the 1¾" post, with the upper hole matching the most upper hole in the square post using the enclosed 2¼" bolts, washers and locknuts. Continue installing the Aluminum **DOGIPOT®** JUNIOR Bag Dispenser according to the mounting instructions enclosed with the Dispenser, ensuring that he upper edge of the Dispenser is approximately **1" below** the lower edge of the **DOGIPOT®** Pet Sign.
- 5. Install the Aluminum **DOGIPOT®** Trash Receptacle through the pre-drilled top oval holes in the back wall of the receptacle and through the square post with the remaining bolts, washers and locknuts, using the 2¾ bolt on top and the 2½ bolt below. **The upper edge of the trash receptacle must be approximately 12½" below the lower end of your Aluminum DOGIPOT® JUNIOR Bag Dispenser so that the lid may completely open.** The upper back wall of the trash receptacle is supposed to touch the head of the lower post carriage bolt, which creates some space between the post and the receptacle, allowing the receptacle lid to open from left to right, without touching the post.
- 6. Insert one of the enclosed **DOGIPOT®** Smart Liner Trash Bags<sup>™</sup> into the trash receptacle, folding it over the interior retainer bands. Proper installation and general maintenance will help expand the life of the trash receptacle and dispenser unit. **DOGIPOT®** offers Product Maintenance Paint to help cover any paint chips which may occur in the powder coating during the life of the product.

#### 7. ENJOY WATCHING PET OWNERS PICK UP AFTER THEIR DOGS!

The Smart Solution to Dog Pollution.

800.364.7681

www.DOGIPOT.com

#### ALL ALUMINUM DOGIPOT® PET STATION (ITEM #1003A-L)

SPECIFICATION, INSTALLATION AND OPERATION SHEET

#### (A) DOGIPOT® PET SIGN (ITEM #1203 / 1204)

- H: 18" x W: 11.5"
- 14 gauge reflective aluminum
- Weight: 1.35 lbs.
- Forest green on white

#### (B ALUMINUM DOGIPOT® JUNIOR BAG DISPENSER (ITEM #1002-2)

- H: 15'5" x W: 9.4" x D: 3.25"
- 12 gauge powder coated forest green aluminum
- Weight: 7 lbs.
- 400 bag capacity
- Two diamond shaped bag dispenser slots
- Front locking access panel
- Clearly posted instructions

#### (C) ALUMINUM TRASH RECEPTACLE WITH LID (ITEM #1206A-L)

- H: 23" x 11.5" diameter
- 11 gauge powder coated forest green aluminum
- Weight: 9 lbs.
- 10 gallon capacity with interior trash liner bag retainer bands
- Attached aluminum hinged lid
- One (1) box 50 count **DOGIPOT®** Smart Liner Trash Bags<sup>™</sup> (ITEM #1404) included (5 lbs.)

#### (D) TELESCOPIC GALVANIZED STEEL MOUNTING POST (ITEM #1301-P)

- 2" x 2" x 8'
- 11 gauge galvanized steel
- Weight: 15 lbs.

#### **TOTAL HEIGHT FROM ABOVE GROUND:**

• 6'.6"

#### **SPACE BETWEEN DISPENSER AND SIGN:**

• 1.0"

#### SPACE BETWEEN RECEPTACLE AND DISPENSER:

• 12.5"


#### SPACE BETWEEN GROUND AND RECEPTACLE:

• 8.0"

#### **HOLE:**

- D: 18.0" x W: 8.0"
- Fill with 40 lbs. "ready to use" cement

#### TOTAL SHIP WEIGHT: 45 LBS. (MOUNTING HARDWARE INCLUDED)

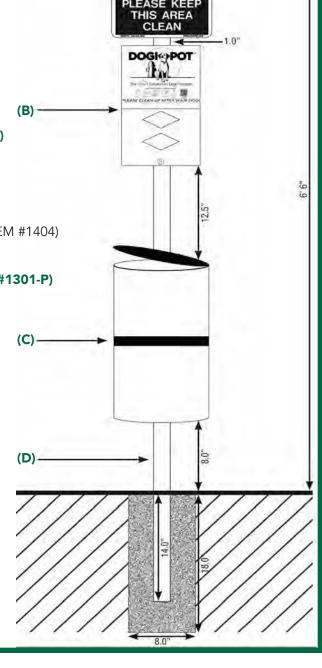

LEASH AND CLEAN

YOUR PET

800.364.7681



www.DOGIPOT.com

## POLY DOGIPOT® DOGVALET® (ITEM #1005-2, ITEM #1006-2, ITEM #1005MCH-2 & ITEM#1005BLK-2) SPECIFICATION, INSTALLATION AND OPERATION SHEET









#### YOUR POLY DOGIPOT® DOGVALET® INCLUDES:

- Poly **DOGIPOT**® DOGVALET®, forest green (ITEM #1005-2), sand beige (ITEM #1006-2), mulch (ITEM #1005MCH-2) or black (ITEM #1005BLK-2)
- Two (2) keys for locking front access lid (same key fits all DOGIPOT® dispensers except ITEM #1007-2)
- Two (2) rolls of **DOGIPOT®** Smart Litter Pick Up Bags<sup>™</sup> (ITEM #1402) (200 count per roll), installed in **DOGIPOT®** DOGVALET® lid
- One (1) box **DOGIPOT®** Smart Liner Trash Bags<sup>™</sup> (ITEM #1404) (50 count)
- Two (2) 3" x 5/16" bolts, washers and locknuts
- One (1) 2" x 1.75" x 2' telescoping galvanized steel mounting post (ITEM #1302T)

PLEASE CHECK THE ABOVE INVENTORY AND CALL YOUR DISTRIBUTOR IF ANY PARTS ARE MISSING.

#### INSTALLATION AND OPERATION INSTRUCTIONS

- 1. Select a good visible spot in your community or park where you want to install the Poly **DOGIPOT®** DOGVALET®.
- 2. Insert the smaller portion of the post (1¾") into the larger portions (2") until the first 9 holes are lined up between the posts. Using the (2) carriage bolts, washers and locknuts, install them in the 4th and 6th holes and tighten. The head of the bolts should face front to back. Over all length should be 38 inches.
- 3. Dig a 7" diameter hole, approximately 14" deep into the soft ground. Insert the smaller (1¾") smaller of the telescoping galvanized steel post approximately 12" into the hole filled with a 40 lb. bag of "ready to use concrete mix". Level the post in strait vertical position and let concrete dry for at lease 12 hours.
- 4. Slide the Poly **DOGIPOT®** DOGVALET®'s back wall inset completely over the 2" x 2" mounting post (see illustration A). Use the (2) 3" bolts, washers and locknuts, fasten the mounting post to the container through the pre-drilled holes inside the DOGVALET® body. You may have to wiggle the DOGVALET® slightly up and down on the mounting post to get the bolts through the holes in the DOGVALET® and the mounting post.
- 5. Insert one of the enclosed **DOGIPOT®** Smart Liner Trash Bags<sup>™</sup> into the container body (fold over the upper edge of the container) (see Illustration B).
- 6. To replace the rolls of **DOGIPOT®** Smart Litter Pick Up Bags™, pull out the empty box, remove the diamond shaped perforated tab from a new bag/roll box and push box in place on the lid shelf. The lid dispenser opening should match the box opening and the lettering on the box should not be upside down. Be sure the bags will be dispensed following the upper wall of the dispenser opening see Illustration C). Close the lid and pull the first bag out by finding the raw edge of the first bag through the dispenser opening.







7. ENJOY WATCHING PET OWNERS PICK UP AFTER THEIR DOGS!

DOGI® POT The Smart Solution to Dog Pollution.

800.364.7681

www.DOGIPOT.com

#### POLY DOGIPOT® DOGVALET® (ITEM #1005-2, ITEM #1006-2, ITEM #1005MCH-2 & ITEM#1005BLK-2) SPECIFICATION, INSTALLATION AND OPERATION SHEET

#### (A) POLY DOGIPOT® DOGVALET® (ITEM #1005-2 AND ITEM #1006-2, ITEM #1005MCH-2 & #1005BLK-2)

- H: 31" x W" 19" x D: 14"
- .192" forest green or sand beige polyethylene
- Weight: 30 lbs.
- 400 bag capacity
- Two diamond bag dispenser slots
- Locking front access lid
- One (1) box 50 count **DOGIPOT®** Smart Liner Trash Bags<sup>™</sup> (ITEM #1404) included (5 lbs.)
- 5" diameter round receptacle openings on each side
- Clearly posted instructions

#### (A)

#### **GALVANIZED TELESCOPING** (B) **STEEL MOUNTING POST (ITEM #1302T)**

- H: 2' x W" 2" x D: 2"
- 11 gauge galvanized steel
- Weight: 9 lbs.
- Two (2) carriage bolts / Two (2) washers & locknuts

#### **TOTAL HEIGHT FROM ABOVE GROUND:**

• 41"


#### SPACE BETWEEN GROUND AND DOGVALET®:

• 10.0"

#### **HOLE:**

- D: 14.0" x W: 7.0"
- Fill with 40 lbs. "ready to use" concrete

**TOTAL SHIP WEIGHT: 48 LBS.** (MOUNTING HARDWARE INCLUDED)

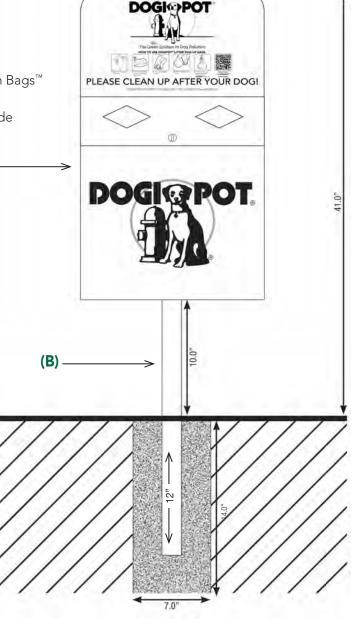



#### **Rudy Estripeaut Endara**

parques infantiles • mobiliario urbano

Torre Banistmo - calle 50 piso 4 Panama, rep de panama Dir. 6090.3223

Ofc. 302.0810

email: info@playtimepanama.com